


EDGES

TECHNICAL SPECIFICATION

Edge with joint for the delimitation of safety flooring areas, playgrounds or other areas for specific activities, made of SBR rubber granules (Styrene Butadiene Rubber) assembled in a cold process with coloured polyurethane resins; length 1000 mm, height ... mm, thickness ... mm.

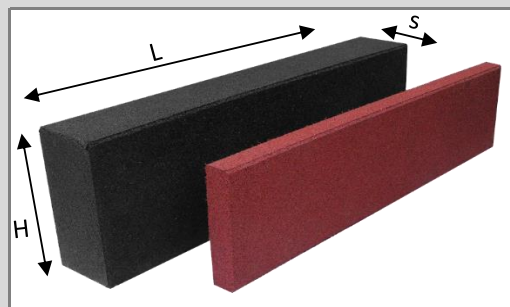


PHYSICAL CHARACTERISTICS

	Unit	100x25x5	100x30x15	Tolerance
Thickness (s)	mm	50	150	± 2
Length (L)	mm	1000		± 1,5%
Height (H)	mm	250	300	± 1,5%
Weight per piece	kg	10,1	33,5	± 5%
Colour (the colour tone could vary from piece to piece)		red/green/gray		

EDGE CONNECTION

TECHNICAL SPECIFICATION

Edge with joint for the delimitation of safety flooring areas, playgrounds or other areas for specific activities, made of SBR rubber granules (Styrene Butadiene Rubber) assembled in a cold process with coloured polyurethane resins; length 1150 mm, height 300 mm, thickness 150 mm. Spacing between the two pin-holes is 1000 mm, with a diameter of 20 mm.

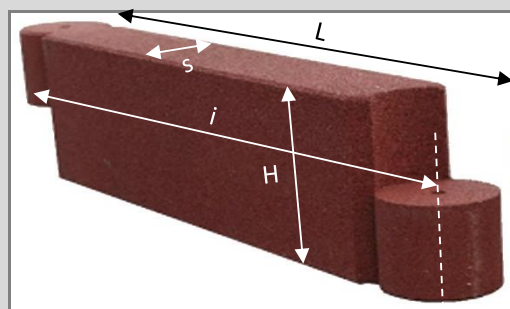

PHYSICAL CHARACTERISTICS

	Unit	EDGE CONNECTION	Tolerance
Thickness (s)	mm	150	± 2
Length (L)	mm	1150	± 1,5%
Height (H)	mm	300	± 1,5%
Spacing of pin-holes (i)	mm	1000	± 1,5%
Weight per piece	kg	34	± 5%
Colour (the colour tone could vary from piece to piece)		red/green/gray	

PHYSICAL AND CHEMICAL PROPERTIES

	Standard	Unit	EDGES	Tolerance
Reaction to fire	EN 13501-1		E _{fl} , E	
Temperature tolerance			- 40° C; + 80° C	

PACKING AND STORING

Each pallet is wrapped and protected with waterproof polythene film. Inside storage is recommended to protected from rainfall.

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved.