


**EDGE L**

**TECHNICAL SPECIFICATION**

L-shaped Edge for protection of low walls at perimeter of safety flooring areas, playgrounds or other areas for specific activities, made of SBR rubber granules (Styrene Butadiene Rubber) assembled in a cold process with coloured polyurethane resins; length 1000 mm, height 150 mm, width 400 mm, thickness 50 mm.

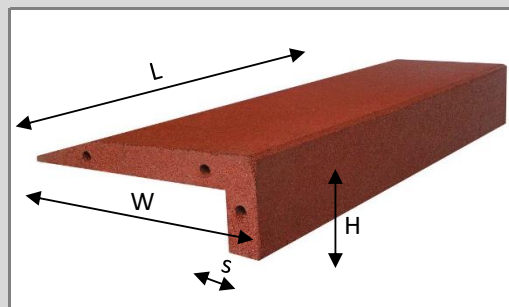


PHYSICAL CHARACTERISTICS	Unit	EDGE L	Tolerance
Thickness (s)	mm	50	± 2
Length (L)	mm	1000	± 1,5%
Height (H)	mm	150	± 1,5%
Width (W)	mm	400	± 1,5%
Weight per piece	kg	18,3	± 5%
Colour (the colour tone could vary from piece to piece)		red/green/gray	

**CYLINDERS**

**TECHNICAL SPECIFICATION**

Pales for the completion of safety floors, playgrounds and areas for specific activities, made of SBR rubber granules (Styrene Butadiene Rubber) assembled in a cold process with polyurethane resins; diameter 250 mm, height ... mm.

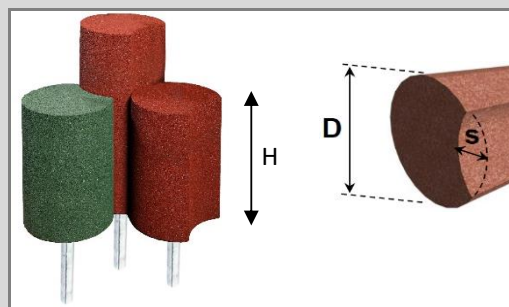

PHYSICAL CHARACTERISTICS	Unit	40	60	80	100	Tolerance
Diameter (D)	mm	250				± 2
Height (H)	mm	400	600	800	1000	± 1,5%
Groove (s)	mm	50				± 1,5%
Weight per piece	kg	12,3	19,4	26,0	32,5	± 5%
Colour (the colour tone could vary from piece to piece)		red/green/gray				

PHYSICAL AND CHEMICAL PROPERTIES	Standard	Unit	EDGE L - CYLINDERS	Tolerance
Reaction to fire	EN 13501-1		E <sub>fl,r</sub> E	
Temperature tolerance			- 40° C; + 80° C	

**PACKING AND STORING**

Each pallet is wrapped and protected with waterproof polythene film. Inside storage is recommended to protected from rainfall.

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved.