

BIWALL


ACOUSTIC INSULATION FOR WALLS



AIRBORNE NOISE THERMAL ACOUSTIC INSULATION CONSISTING OF A POLYESTER FIBRE PANEL AND A SBR AND EPDM RUBBER GRANULES PANEL

■ TECHNICAL SPECIFICATION

Airborne noise insulation in ... mm thick pre-assembled panels made of a panel mm thickness SBR (Stirene Butadiene Rubber) rubber granules and EPDM (Ethylene Propylene Diene Monomer) rubber granules anchored to a non-woven anti-stretch synthetic backing and hot pressed with polyurethane binder; a ... mm thick polyester fibre panel with density 30 kg/m³. The panels dimensions are 1,20 m length and 1 m width.

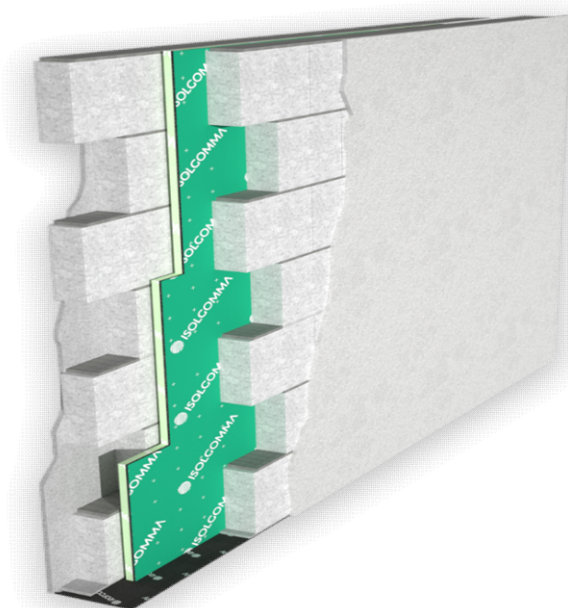

■ TECHNICAL DATA

Thickness	30-40-50 mm
Length	1,00 m
Width	1,20 m
Mass per unit area	≥ 8,6 kg/m ²

■ CERTIFIED ACOUSTIC IMPROVEMENT

Ideal for double walls acoustic insulation. The presence of the rubber panel gives mechanical stability to the product and excellent acoustic performance

■ FLEXIBILITY

Pre-assembled product moisture resistant, Biwall does not release dust. The elasticity of the product allows to adapt to different situations on site

■ LAYING COSTS REDUCTION

The panel size allows fast on-site management, easy dry application or with specific glue

■ TO BE USED WITH

Ideal for heavy walls cavities, acoustic insulation of technical cavediums

Reaction to fire	E
Thermal conductivity coefficient λ	≤ 0,051 W/m K
Transmission Loss Rw	≥ 55 dB
Wall composition - 270 mm thick Plaster 15 mm, light aerated concrete block, Biwall 40, light aerated concrete block, plaster 15 mm	



BIWALL

ACOUSTIC INSULATION FOR WALLS



INSTALLATION INSTRUCTIONS FOR ACOUSTIC INSULATION FOR WALLS BIWALL


- 1** Lay the under wall strip in the dry floor and build the wall



- 2** Apply in the first wall a layer of row mortar of about 1 cm thickness



- 3** Lay points of a gypsum-based glue on the ground panel or use a low-expansion polyurethane glue

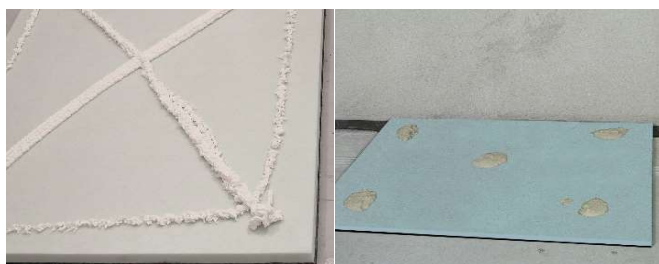

- 4** Apply the panel on the wall by forcing with homogeneous pressure



- 5** When all panels are fixed seal the panel joints with the Stik tape



- 6** Build the second wall. Realize the final plastering



ACOUSTIC CERTIFICATES

Product acoustic certificates are available and allow to comply with the limits imposed by law



INSTALLATION TEST

Acoustic performances of the intervention can be tested on site by a competent technician



ACOUSTIC REPORT

Our technical staff is able to give you the proper support in all the project phases, supporting you in the identification of materials



LAYING ASSISTANCE

Thanks to our extensive commercial technicians network, we are at your disposal for the coordination of the first laying phases on site

SEE THE REFERENCES > VISIT THE WEBSITE

CONTACT THE TECHNICAL DEPARTMENT FOR MORE INFORMATION



www.isolgomma.com
PRG-MOD. 15 - REV. 5.0 01/07/21 EN

© Isolgomma Srl. The data and images are indicative and can be changed at any time without notice

