

BIWALL 50/20

ACOUSTIC INSULATION FOR WALLS




AIRBORNE NOISE THERMAL ACOUSTIC INSULATION CONSISTING OF A POLYESTER FIBRE PANEL AND A SBR AND EPDM RUBBER GRANULES PANEL



■ TECHNICAL SPECIFICATION

Airborne noise insulation in 50 mm thick pre-assembled panels made of a panel 20 mm thickness SBR (Stirene Butadiene Rubber) rubber granules and EPDM (Ethylene Propylene Diene Monomer) rubber granules anchored to a non-woven anti-stretch synthetic backing and hot pressed with polyurethane binder; a 30 mm thick polyester fibre panel with density 30 kg/m³. The panels dimensions are 1,20 m length and 1 m width.

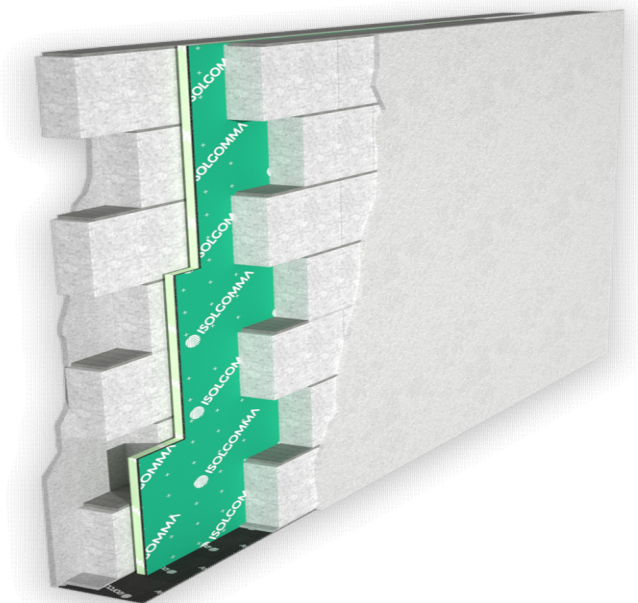

■ CERTIFIED ACOUSTIC IMPROVEMENT

Ideal for double walls acoustic insulation. The presence of the rubber panel gives mechanical stability to the product and excellent acoustic performance

■ FLEXIBILITY

Pre-assembled product moisture resistant, Biwall does not release dust. The elasticity of the product allows to adapt to different situations on site

■ LAYING COSTS REDUCTION

The panel size allows fast on-site management, easy dry application or with specific glue

■ TO BE USED WITH

Ideal for heavy walls cavities, acoustic insulation of technical cavediums

■ TECHNICAL DATA

Thickness	50 mm
Length	1,00 m
Width	1,20 m
Mass per unit area	14,9 kg/m ²

Reaction to fire	E
Thermal conductivity coefficient λ	0,060 W/m K
Transmission Loss Rw	59 dB

Wall composition - 280 mm thick
Plaster 15 mm, 100 mm light aerated concrete block, Biwall 50/20, 100 mm light aerated concrete block, plaster 15 mm



BIWALL 50/20

ACOUSTIC INSULATION FOR WALLS



INSTALLATION INSTRUCTIONS FOR ACOUSTIC INSULATION FOR WALLS BIWALL

1 Lay the under wall strip in the dry floor and build the wall



2 Apply in the first wall a layer of row mortar of about 1 cm thickness



3 Lay points of a gypsum-based glue on the ground panel or use a low-expansion polyurethane glue



4 Apply the panel on the wall by forcing with homogeneous pressure



5 When all panels are fixed seal the panel joints with the Stik tape



6 Build the second wall. Realize the final plastering



ACOUSTIC CERTIFICATES
Product acoustic certificates are available and allow to comply with the limits imposed by law



INSTALLATION TEST
Acoustic performances of the intervention can be tested on site by a competent technician



ACOUSTIC REPORT
Our technical staff is able to give you the proper support in all the project phases, supporting you in the identification of materials



LAYING ASSISTANCE
Thanks to our extensive commercial technicians network, we are at your disposal for the coordination of the first laying phases on site

[SEE THE REFERENCES > VISIT THE WEBSITE](#)

[CONTACT THE TECHNICAL DEPARTMENT FOR MORE INFORMATION](#)



www.isolgomma.com
PRG-MOD. 15 - REV. 5.0 01/07/21 EN

