

# MUSTWALL 33B

## ACOUSTIC INSULATION FOR WALLS




HIGH PERFORMANCE AIRBORNE NOISE ACOUSTIC INSULATION CONSISTING OF A COUPLED PANEL COMPOSED BY SBR RUBBER GRANULES AND A PLASTERBOARD LAYER



### ■ TECHNICAL SPECIFICATION

Pre-assembled 33 mm-thick acoustic insulation panels, made of a 20 mm-thick SBR (Stirene Butadiene Rubber) rubber granules layer, assembled with a 12.5 mm-thick plasterboard. The panels dimensions are 1.20 m width x 2.00 m length.

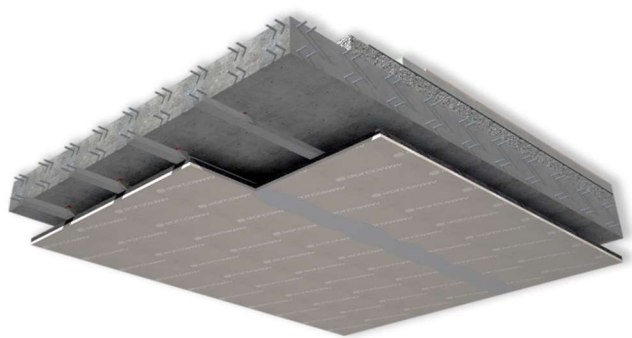

### ■ CERTIFIED ACOUSTIC IMPROVEMENT

CE product for acoustic insulation of floors; it reduces airborne and impact noise between different apartments by improving acoustic comfort

### ■ FLEXIBILITY

Mustwall 33B can be applied to any wall or ceiling with acoustic and vibration-damping functions. High performances in little space

### ■ LAYING COSTS REDUCTION

Supplied already coupled to a plasterboard layer, Mustwall 33B ensures rapid and minimally invasive interventions in terms of dirt and dust production in environments

### ■ TO BE USED WITH

Ceiling solution for renovation and acoustic restoration of existing environments without any demolition work.

### ■ TECHNICAL DATA

Thickness	33 mm
Length	2,00 m
Width	1,20 m
Mass per unit area	19,5 kg/m <sup>2</sup>
Thermal resistance R	0,229 m <sup>2</sup> K/W

Reaction to fire	B-s1,d0
Impact sound pressure level Ln,w	47 dB
Transmission Loss Rw	64 dB
Floor composition - 283 mm thickness Mustwall 33B ceiling, hanged with Redfix C 50 to a 140 mm reinforced concrete floor; 10 mm impact noise insulation, 50 mm sand-cement screed	



# MUSTWALL 33B

## ACOUSTIC INSULATION FOR CEILINGS




### INSTALLATION INSTRUCTIONS FOR ACOUSTIC INSULATION FOR FALSE CEILING MUSTWALL 33B

- 1** Attach the metal frame along the upper perimeter of the room



- 2** Drill the ceiling e fix the acoustic bracket REDFIX C, with spacing based on the load and the type of floor

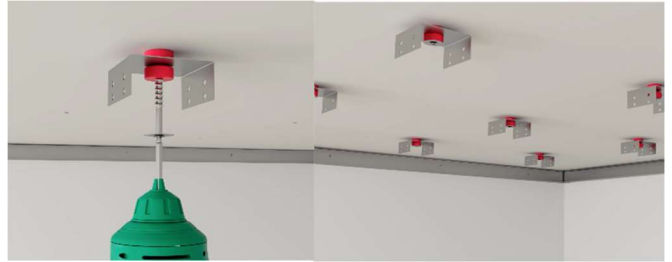

- 3** Fix the metal stud to the acoustic bracket



- 4** Lean the panel to the metal frame



- 5** Fix the panel to the metal frame with gypsumboard's screws. Apply FYBRO panels if necessary



- 6** Apply the plastic mesh tape in the gypsum boards jointing lines and grouting



**ACOUSTIC CERTIFICATES**  
Product acoustic certificates are available and allow to comply with the limits imposed by law



**INSTALLATION TEST**  
Acoustic performances of the intervention can be tested on site by a competent technician



**ACOUSTIC REPORT**  
Our technical staff is able to give you the proper support in all the project phases, supporting you in the identification of materials



**LAYING ASSISTANCE**  
Thanks to our extensive commercial technicians network, we are at your disposal for the coordination of the first laying phases on site

[SEE THE REFERENCES > VISIT THE WEBSITE](#)

[CONTACT THE TECHNICAL DEPARTMENT FOR MORE INFORMATION](#)



[www.isolgomma.com](http://www.isolgomma.com)  
PRG-MOD. 15 - REV. 5.0 30/05/23 EN

© Isolgomma Srl. The data and images are indicative and can be changed at any time without notice

