



# ROLL UNDER SCREED ACOUSTIC INSULATION



REDUCED THICKNESS IMPACT NOISE  
ACOUSTIC INSULATION MADE IN ROLLS WITH  
SBR RUBBER GRANULES

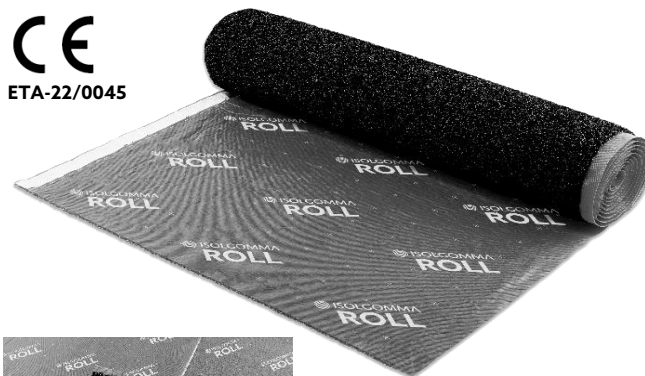

**CE**  
ETA-22/0045

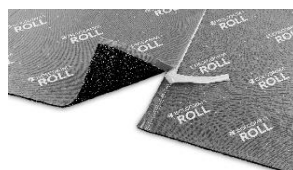


Self-adhesive side band for joining the mats



## ■ TECHNICAL SPECIFICATION

5 mm acoustic insulation under screed rolls, made of fibres and granules rubber from End-of-Life Tyres (ELTs), compacted using a latex binder in a hot process. A grey synthetic non woven anti-stretch backing is applied on one side. The dimensions of the roll are: 500 cm length, 104 cm width including 4 cm adhesive side border for rolls overlapping during installation. The total mass surface is 1,90 kg/m<sup>2</sup>. Impact sound pressure level attenuation 21 dB, reaction to fire E, thermal conductivity coefficient 0,094 W/m K. Recycled content 86%.

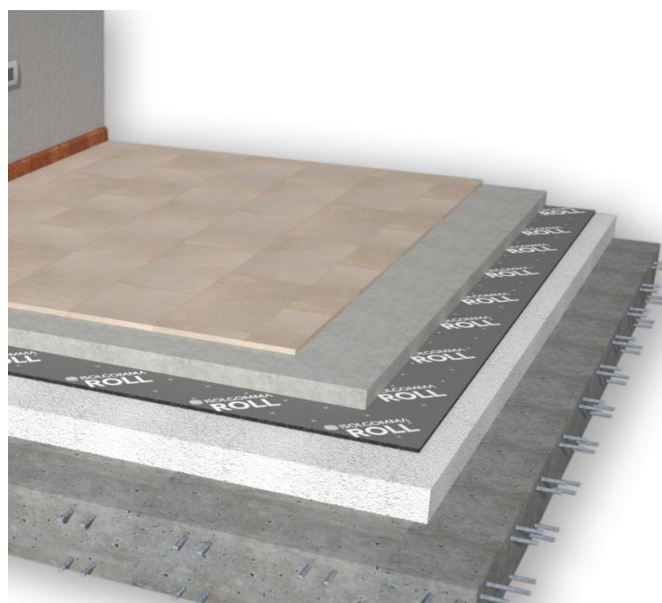

## ■ CERTIFIED ACOUSTIC IMPROVEMENT

Designed and created to ensure excellent acoustic performances even with limited intervention thicknesses

## ■ FLEXIBILITY

The reduced thickness makes it suitable for renovation interventions where the various systems has to adapt to the needs without compromising the final result

## ■ LAYING COSTS REDUCTION

Equipped with printed TNT to facilitate measuring and cutting activities. A special adhesive stick facilitates the junction between the mats

## ■ TO BE USED WITH

Under screed acoustic insulation for massive floors where a high impact noise performance is required and with low intervention thickness. Also suitable where radiant systems are present

## ■ TECHNICAL DATA

Thickness	5 mm
Length	5,00 m
Width (including 4 cm overlapping band)	1,04 m
Mass per unit area	1,90 kg/m <sup>2</sup>
Recycled content	86%

Dynamic stiffness s'	21 MN/m <sup>3</sup>
Compressibility c	1,4 mm
Impact sound pressure level attenuation ΔL <sub>w</sub>	22 dB
Reaction to fire	E
Thermal conductivity coefficient λ	0,094 W/m K




# ROLL UNDER SCREED ACOUSTIC INSULATION




## INSTALLATION INSTRUCTIONS FOR ROLL


**1** Apply the adhesive strip to the wall and floor with particular attention in the corners

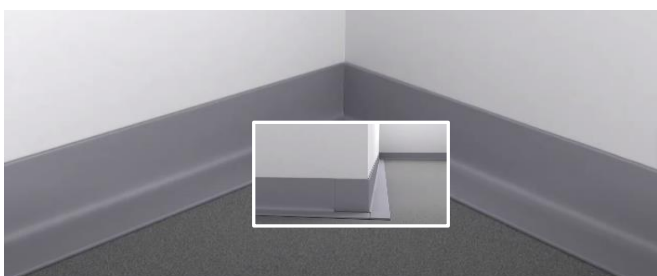

**2** Install the acoustic mat with rubber granules facing down

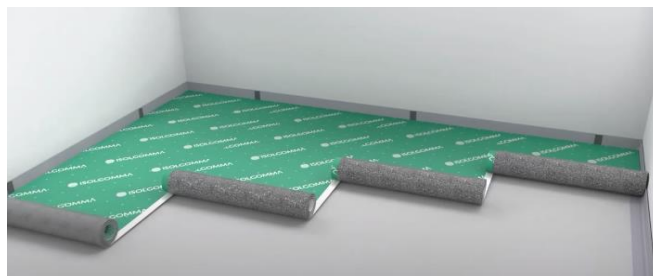

**3** Joint two adjacent mats using the pre-built adhesive tape and following the dashed lines

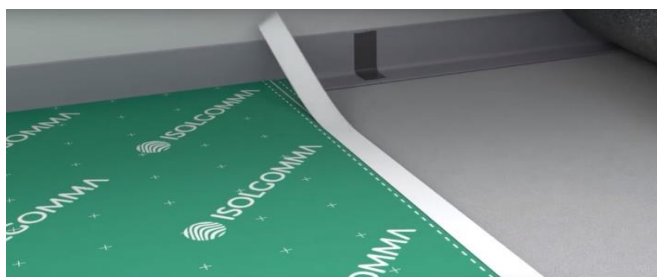

**4** Build the screed



**5** Install the floor finishing (ceramic or wood)



**6** Cut the exceeding part of the edging strip



**ACOUSTIC CERTIFICATES**  
Product acoustic certificates are available and allow to comply with the limits imposed by law



**INSTALLATION TEST**  
Acoustic performances of the intervention can be tested on site by a competent technician



**ACOUSTIC REPORT**  
Our technical staff is able to give you the proper support in all the project phases, supporting you in the identification of materials



**LAYING ASSISTANCE**  
Thanks to our extensive commercial technicians network, we are at your disposal for the coordination of the first laying phases on site

SEE THE REFERENCES > VISIT THE WEBSITE

CONTACT THE TECHNICAL DEPARTMENT FOR MORE INFORMATION



www.isolgomma.com  
PRG-MOD. 15 - REV.5.4 30/06/24 EN

